


# TECHNICAL DATA SHEET ( FIRM GRIP PLASTER FLOAT )

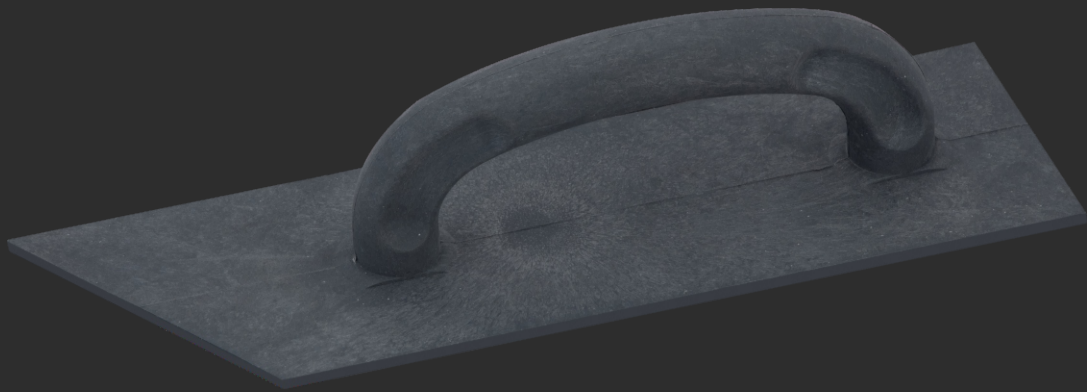

## PRODUCT DESCRIPTION

Firm Grip Plaster Float is helpful for finishing and applying plaster, and other mortar materials, ergonomically plastic handle makes it comfortable to hold, this float ensures complete coverage. It is helpful in corners. It is Heavy than other options available in market and dimensionally stable. Full cast of strong polystyrene which gives the product a long life use.

## MATERIAL USED

High Impact Polystyrene (H.I.P.S.).

## FEATURES

1. Excellent Toughness
2. Excellent impact resistance
3. Used specifically to smooth surfaces in hard-to-reach areas.
4. Low water absorption.
5. Flexible at low temperature
6. Durable

## DIMENSIONAL SPECIFICATION : -

Property	Length (±2mm)	Width (±2mm)	Thickness (±0.2mm)
Firm Grip Plaster Float	260	80	4,4

## PHYSICAL AND CHEMICAL PROPERTIES: -

Property	Test Method	Unit	Nominal Value
Color			Black
Hardness	-	Shore D	75
Flexural Strength	ASTM D790	Kg/cm <sup>2</sup>	365
Maximum Melt Temperature	-	°C	180-260

## STORAGE RECOMEDATION

Components should be stored in dry/closed conditions at temperatures below 50°C and protected from UV / Direct sunlight. Original packing should open while going to use.

## NOTE

- Product is in compliance with substance of Very High Concern (SVHC) i.e.  $\leq 0.1\%$  w/w as per the candidate list promulgated by the European Chemicals Agency (ECHA) which are defined in Article 57 of REACH Regulation (EC1907/2006) checked by Tuv-Nord Group.