


TECHNICAL DATA SHEET

(FIRM GRIP FLOAT WHITE WITH HYDRO FOAM)

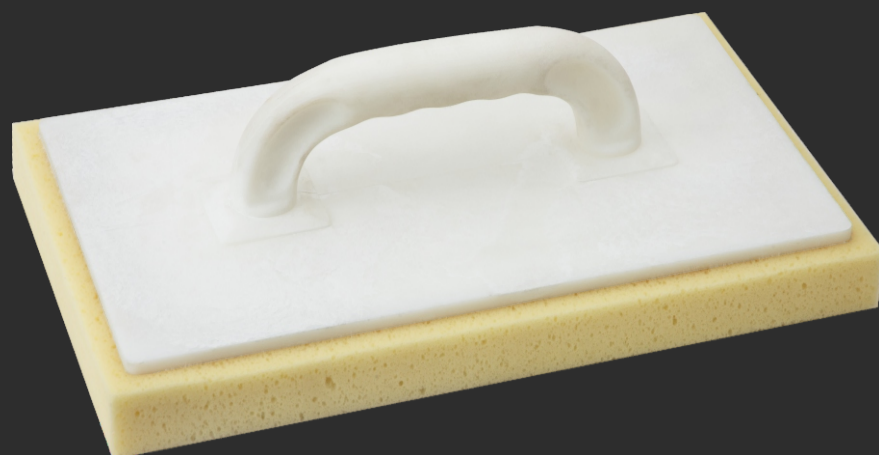

PRODUCT DESCRIPTION

Firm Grip Float with PU Hydro Foam is a heavy duty Product. This sponge float comes with an extra absorbent hydro sponge for cleaning of tiles after grouting. Float is heavy than other options available in market and dimensionally stable. Hydro sponge with very high absorbency. The sponge has open cells which prevents dirt and residues from sticking on it. Suitable for tiling, painting, wallpapering and cleaning.

MATERIAL USED

High Impact Polystyrene (H.I.P.S.), Polyurethane Flexible Foam or PUR & Polypropylene.

KEY FEATURES

- Excellent Toughness
- Hydro sponge hold more water
- Open cell
- Minimize grout removal from joints.
- Used for cleaning purpose.

DIMENSIONS

Sr. No.	Description	Length (±2mm)	Width (±2mm)	Float Thickness (±0.2mm)	Foam Thickness
1	Firm Grip Float With Hydro Foam 140X280X30	280	140	4.6	30
2	Firm Grip Float With Hydro Foam 150X300X30	300	150	4.6	30
3	Firm Grip Float With Hydro Foam 160X300X35	300	160	6.0	35
4	Firm Grip Float With Hydro Foam 200X340X30	340	200	6.0	30
5	Firm Grip Float With Hydro Foam 120X240X30	240	120	4.4	30

PHYSICAL PROPERTIES OF FLOAT:

Property	Test Method	Unit	Nominal Value
Color	-	-	white
Hardness	-	Shore D	75
Flexural Strength	ASTM D790	Kg/cm ²	365
Maximum Melt Temperature	-	OC	180-260

PHYSICAL PROPERTIES OF HYDRO FOAM:

Property	Unit	Value
Appearance	-	Cellular
Density	kg/m ³	27.0
Soluble in water	-	insoluble
Decomposition	-	> 180 OC
Stability	-	-40 OC and 100

STORAGE RECOMEDATION

Components should be stored in dry / closed condition at temperature below 50°C and protected from UV / Direct sunlight. Original packing should open while going to use.

NOTE

- Product is in compliance with substance of Very High Concern (SVHC) i.e. ≤ 0.1 %w/w as per the candidate list promulgated by the European Chemicals Agency (ECHA) which are defined in Article 57 of REACH Regulation (EC1907/2006) checked by Tuv-Nord Group.