


# TECHNICAL DATA SHEET ( FIRM GRIP PLASTER FLOAT )

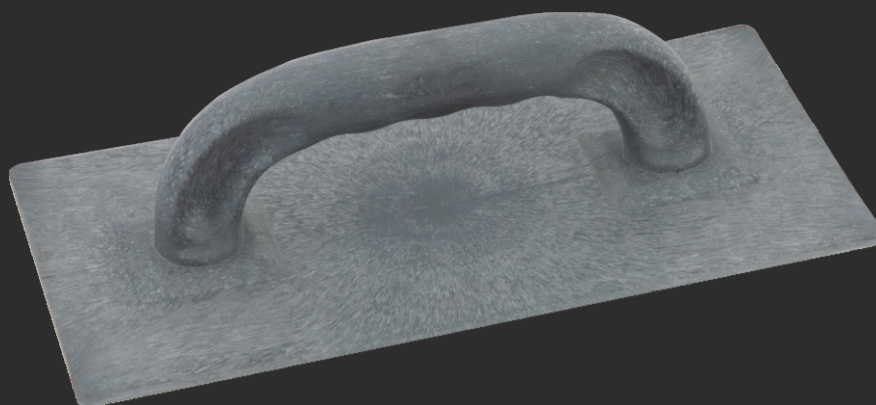

## PRODUCT DESCRIPTION

Firm Grip Plaster Float is helpful for finishing and applying plaster, and other mortar materials, ergonomically plastic handle makes it comfortable to hold, this float ensures complete coverage. It is Heavy than other options available in market and dimensionally stable. Full cast of strong polystyrene which gives the product a long life use. Material used: High Impact Polystyrene (H.I.P.S.).

## MATERIAL USED

High Impact Polystyrene (H.I.P.S.).

## FEATURES

1. Excellent Toughness
2. Excellent impact resistance
3. Low water absorption.
4. Flexible at low temperature
5. Durable

## DIMENSIONAL SPECIFICATION : -

Property	Length (±2mm)	Width (±2mm)	Thickness (±0.2mm)
Firm Grip Plaster Float 230X110	230	110	4.4
Firm Grip Plaster Float 270X130	270	130	4.6

## PHYSICAL AND CHEMICAL PROPERTIES: -

Property	Test Method	Unit	Nominal Value
Color			Grey
Hardness	-	Shore D	75
Flexural Strength	ASTM D790	Kg/cm <sup>2</sup>	365
Maximum Melt Temperature	-	°C	180-260

## STORAGE RECOMEDATION

Components should be stored in dry / closed condition at temperature below 50°C and protected from UV / Direct sunlight. Original packing should open while going to use.

## NOTE

- Product is in compliance with substance of Very High Concern (SVHC) i.e. ≤ 0.1 %w/w as per the candidate list promulgated by the European Chemicals Agency (ECHA) which are defined in Article 57 of REACH Regulation (EC1907/2006) checked by Tuv-Nord Group.